



VM-64X16M MATRIX SWITCHER, 64 INPUTS, 16 OUTPUTS

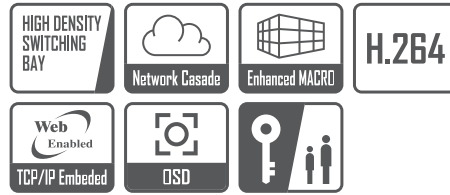

APPLICATION

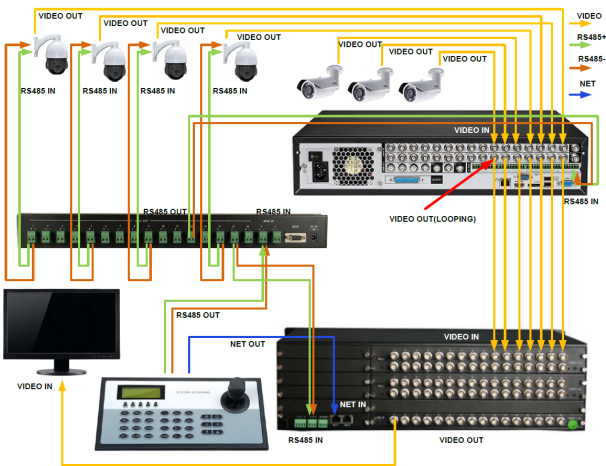


OPTIONAL ACCESSORIES

Keyboard Controller: KBD-5820

DIMENSION

Unit: mm

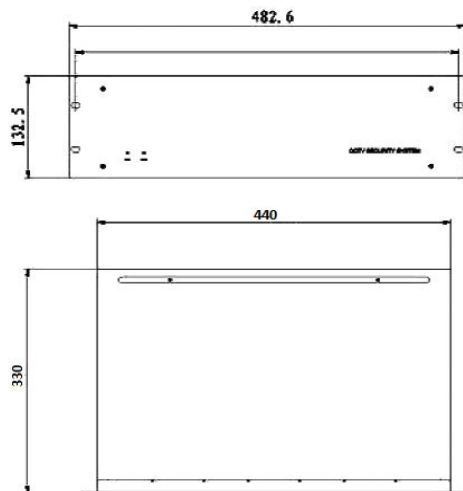

FEATURES

- Microprocessor-Based, Full Cross-Point Video Matrix
- Single Node CPU Systems Control Up to 64 Cameras and 16 Monitors
- Built-in Video Loss Detection
- Built-in System Diagnostics
- Factory Tested Prepackaged Systems
- Logical Camera Selection and Priority Level Operation
- 1 RS-485 COM Port, 1 RS-422 port and 1 RJ45 port
- Built-in Web Server Supports Online Setting and Upgrading
- Powerful Macro Programming
- Responds up to 512 Alarms

SPECIFICATIONS

VIDEO	
Video Input	Up to 64 CH
Video Output	Up to 16 CH
Input Impedance	75 Ohms -1Vp-p
Output Impedance	75 Ohms -1Vp-p
Video Bandwidth	10MHz
Channel Isolation Degree	>50dB
Signal to Noise Ratio	>55dB
POWER	
Power Supply	120V@60Hz / 220V@50Hz
Power Consumption	18W
CONNECTORS	
Connector Type	BNC
RS-485 Port	1
RS-422 Port	1
RJ45 Port	1
GENERAL	
Dimensions	440mmx330mmx133mm
Operating Temperature	-10%~+50%
Operating Humidity	<90% relative, non-condensing
Unit Weight	8KG
Shipping Weight	17KG

