


# MCR1.3AHC36-IR30



High resolution AHD, 1.3Mega Pixel, 12VDC



## Dimensions:

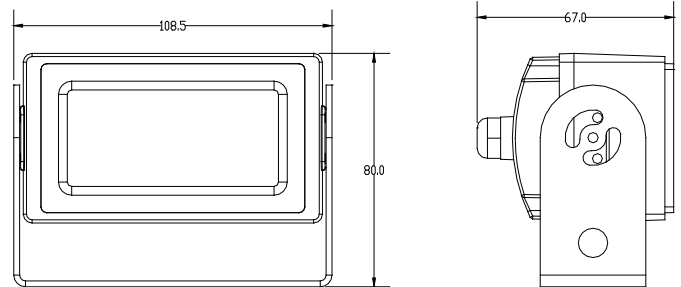

## Features:

- Mobile rear view camera with 3.6mm fixed lens. (2.8mm Optional)
- Minimum Illumination: Color: 0.1Lux/F1.2, B/W: 0 Lux (IR LED ON)
- Low power consumption.
- Easy installation on ceiling or wall, surface or flush mount.
- 30 LEDs.
- IR Cut Filter Available. (Infrared Spectrum 850nm).
- BNC or 4 Pin Din Connector (Optional)
- IP Rating: IP67.

## Packing List:

Camera	1
Manual	1
Self-tapping screw	2
Hexagon key	1

## Operation procedures:

1. Loosen two side screws, remove the U bracket.
2. Fix the U bracket by the supplied self-tapping screw.
3. Install the camera to the U bracket.
4. Connect the camera as follows.



5. Fix all the lock screw.

## Specifications:

Model	MCR1.3AHC36-IR30
Image Sensor	1/3" CMOS AR0130
TV System	NTSC/PAL (optional)
Picture Elements	1280 (H) x 800 (V)
Sensitivity	0 Lux (IR LED On)
Scanning System	Progressive scan RGB CMOS
Synchronization	Internal
S/N Ratio	More than 44dB (AGC Off)
Auto Gain Control (AGC)	Auto
Electronic Shutter	Auto
BLC	Auto
Infrared Spectrum	850nm
Infrared LED	30 LEDs (ø5.0)
Video Output	1 Vp-p, 75Ω, AHD
Audio	N/A
Mirror	Optional
ICR	Available
Noise Reduction	3D
Dynamic range	83.5 dB
Lens	f3.6mm Megapixel
Power Supply	12VDC
Power Consumption	270mA
Dimensions	108.5(L) x 67(H) x 80 (W) mm
Net Weight	680 g
Weatherproof/Water Proof	IP67
Operating Temperature	-30° C ~ +70 ° C

\* Specifications are subject to change without prior notice \*

