

## 2.5' (4 IN 1) HD IR MINI DOME PTZ CAMERA



### Product overview :

- 2.0MP 1/2.9" Low illumination CMOS, 3X optical zoom
- Support TVI, AHD, CVI and Analog (Selectable)
- D-WDR
- Support lightning, surge and voltage transient protection
- Outdoor speed dome camera protection grade: IP66, IK10
- Support English IE interface and have operation tips function, user interface friendly



### Product:

2.5' (4 IN 1) HD IR mini dome PTZ camera


### Model:

MPTZ-3XHD2MP-WIR

### Features:

- Adopt 3pcs infrared light, effective exposure distance up to 20m
- Horizontal rotation 355° continuous rotation, Vertical 0° ~ 90°, support automatic flip, no monitoring blind spot
- Pan speed max 25°/s, tilt speed max 20°/s
- Pan speed 0°/s~25°/s, tilt speed 0°/s~20°/s
- Support COC (Control Over Coax), 16 preset, 1 patrols, 1 patterns and AB scan
- Proportional zoom function, rotation speed can be adjusted automatically according to zoom multiples
- Support park action, presets/pattern/patrol/pan scan can invoke automatically after a defined time of inactivity

### Drawing Structure:

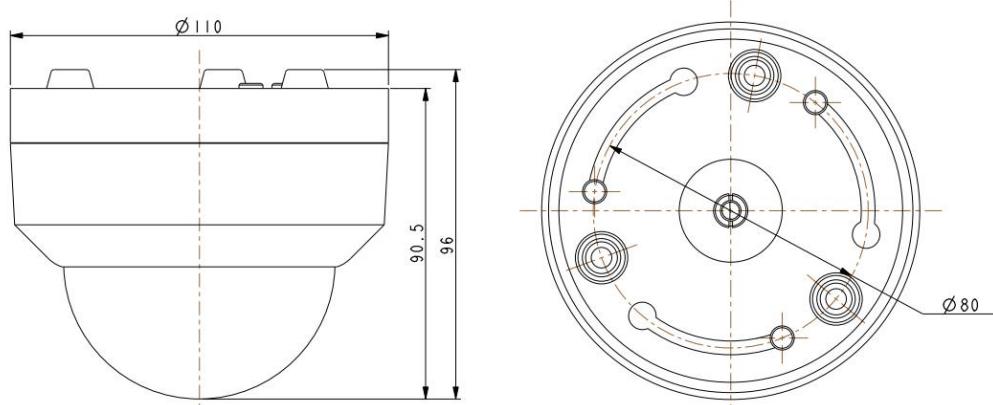

## Technical Parameters

Model	MPTZ-3XHD2MP-WIR
Image sensor	1/2.9" CMOS Sensor
Resolution	1920X1080
Low illumination	Color: 0.2Lux@F1.2; Black-White: 0.01Lux@F1.2
Signal/scan system	NTSC/PAL Progressive
Electronic shutter	Auto/manual (1/5 ~ 1/50000)
Day-night mode	D-WDR, Auto ICR
Optical zoom	2.8 ~ 8mm; 3x optical zoom
Pan angle	106.6° ~ 51.8°
IR distance	20M
Pan speed	Horizontal rotation 355 ° continuous rotation, 0°~25°/S
Tilt speed	0 ~ 20°/S
Tilt range	0° ~ 90°
Proportional zoom	Support, the speed changes based on the zoom
Preset	16
Patrol	1
Pattern scan	1
A.B scan	Support
Park function	Support, preset, cruise, pattern scan, two-point line sweep, horizontal automatic
Max image size	1920X1080
COC	Support Control Over Coax
Video system	Support TVI, AHD, CVI & Analog ( Selectable)
Browser	Support IE7, IE8, IE9, IE10, IE11, Chrome 8+, Firefox3.5+, Safari5+
PTZ control protocol	Pelco D, Pelco P, Hikvision, Dahua, etc.
Power consumption	DC 12V1A、 10W(max)
Working temperature and humidity	-20°C ~ +60°C, ≤90% RH(no frostless)
Protection grade	TVS3000V lightning protection, surge protection and voltage transient protection, weather proof (for outdoor): IP66, IK10.

