


19" LED HD CCTV Monitor





Frame Type (Side look)



Product Diagram (Unit: mm)

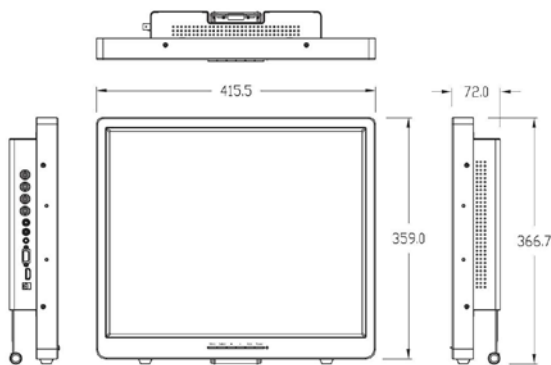

Input / Output

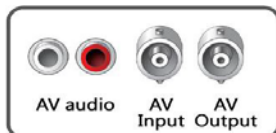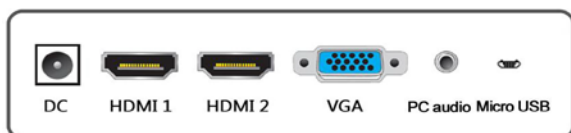

LED technology benefits from intelligent color corrective technology with a mercury-free WLED backlight that automatically detects image signal and controls backlight brightness for blacker blackspurer whites and more clearly defined grays.

Features

- HD display 1280 x 1024.
- Excellent contrast ratio and brightness.
- Analogue video is very clear with no detail loss.
- Built-in 3D comb-filter & 3D de-interlace.
- Rugged metal case.
- VESA hole 75 x75 (mm).
- PIP / PBP Multi-display function.
- 1 x Composite BNC In / Out for looping.
- No Mercury.Environment-friendly Product.
- LED backlit leads to less power consumption.

Model	LED19-MC
General	
Diagonal size	19"
Panel type	TFT LCD
Aspect ratio	5 : 4
Resolution	1280 x 1024
Pixel pitch	0.294 x 0.294 mm
Color depth	16.7 Million Colors
Backlight	LED
Optical (typ.)	
Brightness	300 cd/m2
Contrast ratio	10000: 1
Response time (Tr + Tf)	5 ms
Viewing angle	Vertical -80° ~ 80° / Horizontal -85° ~ 85°
Operation	
Input Interface	BNC x 1, HDMI x 2, VGA x 1, Micro USB x 1, RCA x 2, PC Audio x 1
Output Interface	BNC x 1
Display mode	HDMI 1 / HDMI 2 / PC / USB / AV
OSD	Picture Mode, Contrast, Brightness, Color, Tint, Sharpness, Color Temp, DNR
OSD Languages	English, German, French, Italian, Spanish, Russian, Turkish, Polish, Dutch, Czech
Speaker	1.5 W x 2
Remote control	Optional
Composite Video	
System	PAL / NTSC
Video processing	Motion Adaptive 3D De-Interlacer and DNR, 4H Comb filter Y/C separation
Electrical	
AC power	AC 100-240V 50/60HZ
Power consumption	< 25W
Power supply	External power adapter
Mechanical	
Case material	Metal
Dimension (W x H xD)	416 x 367 x 72 mm
Support	Optional
Mounting interface	75 x 75 mm , M4 x 4 holes
Net weight (Monitor & stand)	3.3Kgs (7.3 lbs)
Environment	
Temperature	Operation: 0° ~ 40°C(32° ~ 104°F) , Storage: -10° ~ 60°C(14° ~ 140°F)
Humidity	10%-90%
Safety	FCC, CE, ROHS
Delivery set	Monitor, Power cord with adapter, VGA cable, User Manual