

User Manual for BWC-I5



Structural Diagram

1. Charge indicator

2. IR Sensor

3. Microphone

4. IR light

5. Battery cover

6. Menu button

7. Playback button

8. Status indicator

9. Laser light


10. Lighting light

11. Camera

12. Audio REC button

13. ON/OFF button

14. Battery lock

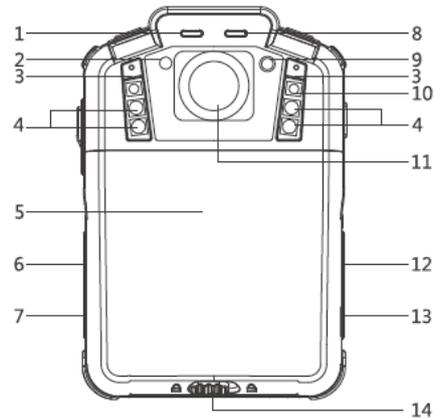

15. Video REC button

16. USB port

17. External camera port

18. Clip locker

19. Snapshot button


20. Line hole

21. Speaker

22. PTT button

23. LCD Screen

24. Pogo-pin Data interface

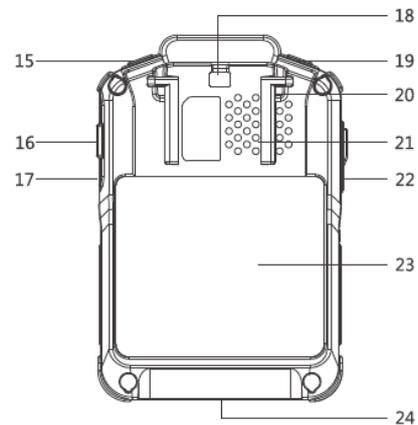


Remark: External equipment should be selected according to models and functions of the device.

Functions and Operations

1. Turning On the Camera

In power off status, long press  for 3 seconds, the camera will be turn on and enter into preview mode automatically. Meanwhile, the status indicator will turn green. In preview mode, the following screen will appear:

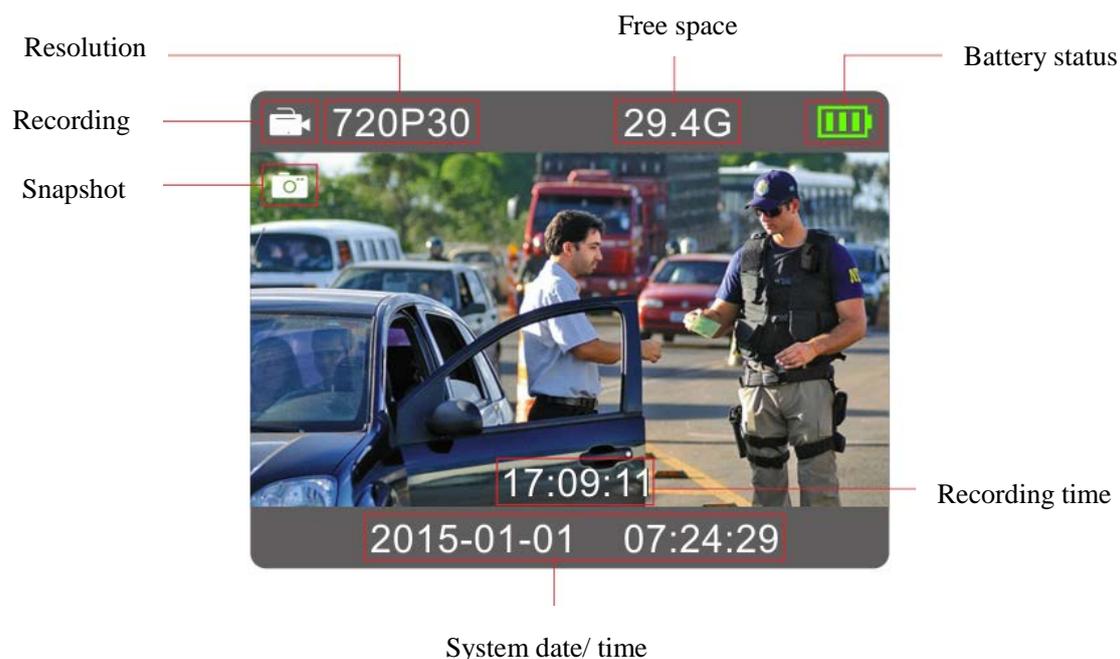

2. Turning Off the Camera

In preview mode, long press  for 3 seconds, after two beeps, the camera will save the current status and power off. Meanwhile, the status indicator will turn off.

3. Snapshot

In preview mode, press  to take a photo; long press  to take more photos continuously, the quantity of photo can be configure in the menu. There is a crack sound when a photo was taken, and the photo will be saved in JPG format automatically.

4. One Touch Snapshot

In power off status, long press  to turn on the camera and a photo will be taken. The status indicator will turn red and flash. The photo will be saved in JPG format automatically.

5. Recording Video

In preview mode, short press  to start recording. Meanwhile, the status indicator will turn red and flash, and the recording icon will turn to yellow. Short press  again to stop recording, and the video will be saved in MP4 format automatically.

Remark: During video recording, long press “Audio REC” button to mark the video as important video, press again to cancel it. And press “Snapshot” button to zoom in and zoom out.

6. One Touch Video Recording

In power off status, long press  to turn on the camera and it will start recording. Meanwhile, the status indicator will turn red and flash, recording icon will turn to yellow. Press  again to stop recording, and the video will be saved in MP4 format automatically.

7. Audio Recording

In preview mode, press  to start audio recording. Meanwhile, the status indicator will turn to yellow and flash. Press  again, the camera will stop audio recording, and the audio will be saved in WAV format automatically.

8. One Touch Audio Recording

In powered off status, long press , the camera will be turn on and start audio recording. Meanwhile, the status indicator will turn yellow and flash. Press  again, the camera will stop audio recording, and the audio will be saved in WAV format automatically.

9. IR Mode

In preview mode or during recording a video, long press  to switch to IR mode. Long press  again to exit from IR mode.

10. Supplementary Lighting

In power on status, short press  to turn on the supplementary lighting, and short press  again to turn it off.

11. Laser Light

Manual mode: in preview mode or during recording a video, short press “PTT” button to turn on the laser light; short press “PTT” button again to turn it off.

Auto mode: During video recording status; it will turn on laser light to position automatically.

12. Playback

In the preview mode, press  to enter into the playback interface. The move left icon is  and the move right is , press  to confirm your selection, press  to exit, as the figure shown:

Left→ video  Right→ photo  OK→ playback  Exit→ menu 

13. GPS

The device is equipped with built-in GPS module, it will locate your position and the position information will be saving as a special file. When the GPS is ON, you can see the GPS icon in the live view mode, green means GPS signal is normal, and you will see the latitude and longitude info.

14. Turning Off the Screen

In preview mode or during video recording, short press  to turn off LCD screen, meanwhile, this camera will go to sleep mode. Press any button to wake LCD screen and the camera will exit from sleep mode.

15. Menu configuration

In preview mode, press  to turn off screen display to enter menu interface, press  to select the option menu, and then press  to confirm the operation, and then press / to select corresponding icon, and then press  to active the option.

16. Reset

In case the camera crashed and it can't be power on or power off, press this button to reset it, and then try again.


Remark: This operation will not cause loss or damage of any data, and modify the parameters either.

17. Charging the Battery

This camera has a chargeable battery built in. In case of low battery, please connect this camera to power supply for battery charging.


1. Charge the camera

Connect this camera and adapter via USB cable, and connect adapter to power supply to charge the battery. In charging status, the status indicator will turn red. Once the battery is fully charged, the status indicator will turn green.

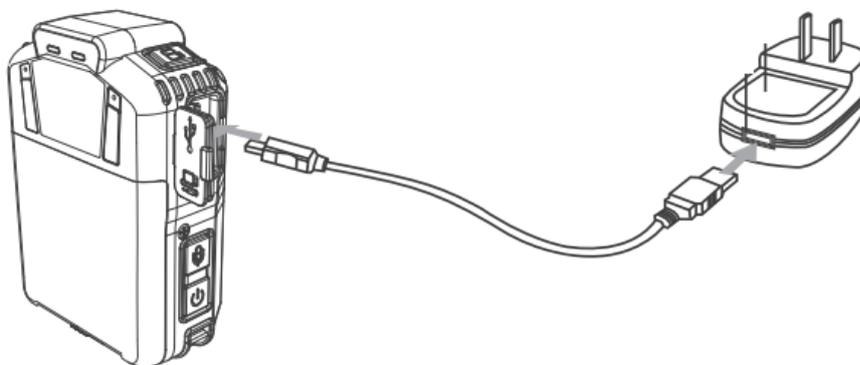


2. Charge the battery

Connect the battery charger to the power supply to charge the battery. In charging status, the status indicator will turn red. Once the battery is fully charged, the status indicator will turn green.

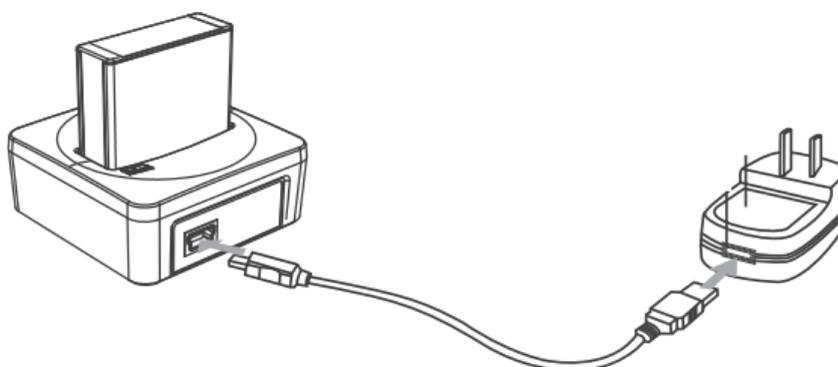

Remark: When you recharge the body camera, please make sure it is OFF. Also, even you don't use the camera for a long time; please recharge it every 3 months.

18. Replace the built-in battery

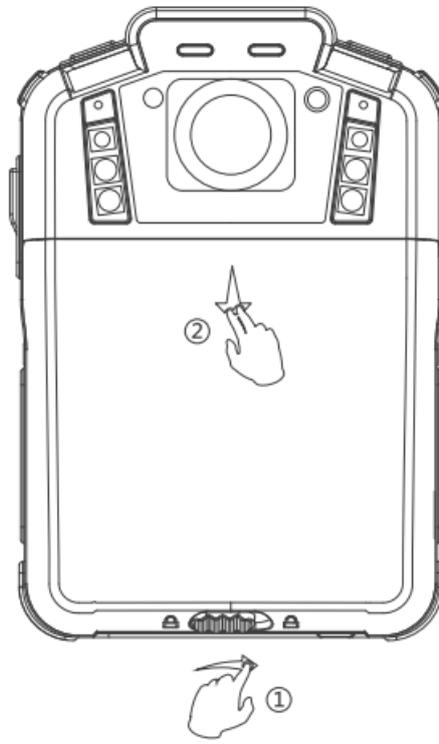

Step1: Drag the battery lock from the left side to the right side, and then the cover will be unlock. And keep the lock on the right side, and then go to step 2.

Step2: Follow the direction to pull the battery cover.